



The future of sustainable and fire-resistant construction

A large, semi-transparent green graphic element is positioned on the left side of the page, curving from the bottom left towards the center. It features a white, rounded rectangular callout containing the text "Product specification".

Product specification

MAGOXX® Tape

Version: 2026

info@magoxx.com




+31 (0) 88 3748400

www.magoxx.com

MAGOXX® Tape

Tape for airtight sealing on the inside of the construction

MAGOXX® Tape is a UV-resistant, water-repellent, single-sided adhesive tape. The tape consists of a polyester backing with a strong acrylic adhesive. This adhesive guarantees excellent adhesion to virtually all types of surfaces. Thanks to the combination of water-repellent and UV-resistant properties, MAGOXX® Tape is ideal for use in facade construction, for example, in combination with our 4, 9, or 12 mm MAGOXX® cavity wall cladding. This tape ensures a reliable airtight and watertight seal at seams, overlaps, and connections.

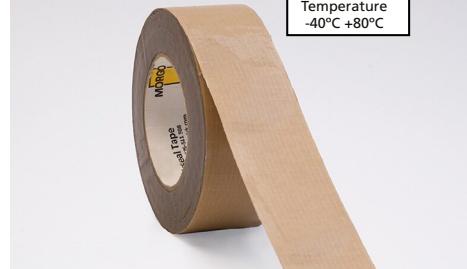

Feature	Application	Thickness in mm
Material		Single-sided adhesive tape. Transparent LDPE film with reinforcement.
Colour		Transparent
Thickness		Approx. 0.30 - 0.33 mm (without protective layer)
Tensile strength	AFERA 5004	50N/50mm
Elongation at break	AFERA 5004	3-5%
Temperature resistance		-40°C +80°C

Documents/certificates

KOMO		No
DOP		No
CE		Yes

Other

Size		60mm x 25m1
Packaging		10 rolls per box
Application		Tape for airtight sealing inside the structure





The future of sustainable and fire-resistant construction

MAGOXX B.V.
Caballero Fabriek
Saturnusstraat 60, Unit 71
2516 AH The Hague
The Netherlands
+31 (0) 88 3748400